



1
Loosen the cap, but do not remove. Slide the line through the lead ensuring the hook sits at the opposite end to the cap.

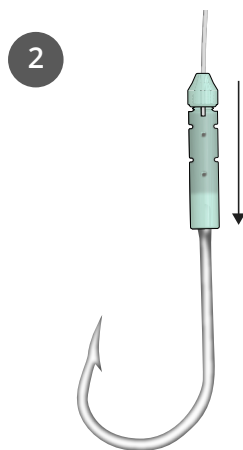


2
Slide the lead all the way down to the hook. If possible the bottom of the lead should sit over the hook eye.

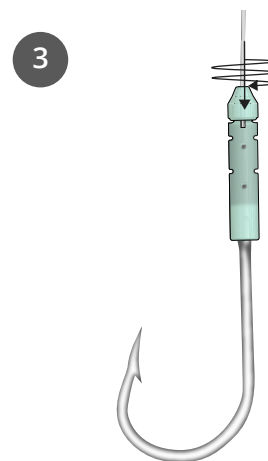


3
Tighten the cap firmly by hand so that it grips the line.


Safety & correct usage of the Lumo Sliding Lead

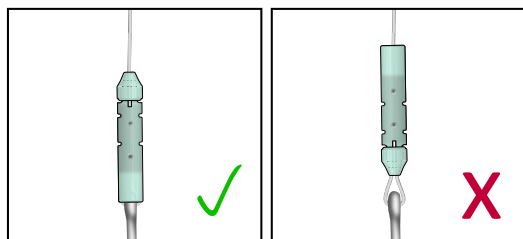


Ensure the correct orientation of the Lumo Sliding Lead

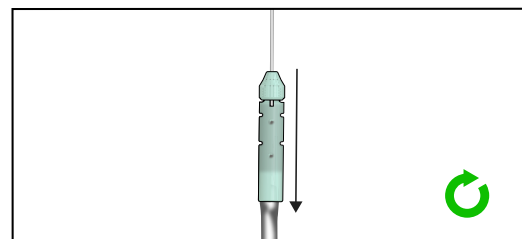


Check each lead after use and push them back down to the hook if necessary

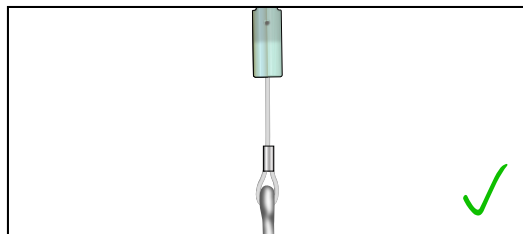

There should be no crimps or other obstructions fitted to the line between the lead and the hook fitting, as this will prevent the lead from safely sliding down the branch line in the event of a bite off.

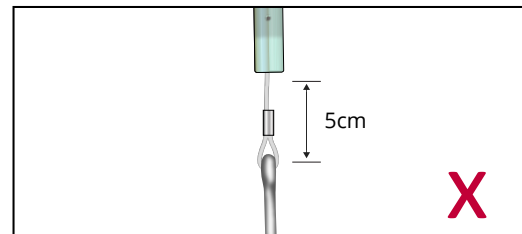

Sliding Lumo Leads should not be placed at a distance greater than 5cm from the hook on vessels using a bait caster

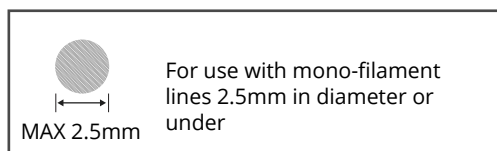

For use with mono-filament lines 2.5mm in diameter or under

X Not for use with steel leaders